

To DIN 3352 part 4  
With spigot ends for cast iron pipes to ISO 2531

**Use:**

For water, sewage and neutral liquids to max. 70°C

**Tests:**

Hydraulic test to DIN 3230 part 4:

Seat: PN  
Body: 1.5 x PN

Operating torque test

**Optional extras:**

Handwheel  
Extension spindle  
Stem cap

**Materials:**

Body and bonnet	Ductile iron, GGG-50, to DIN 1693 (BS 2789 grade 500 - 7)
Coating	Electrostatically applied epoxy resin to DIN 30677 - internally and externally
Stem	Stainless steel, DIN X 20 Cr 13
Stem sealing	NBR wiper ring, 2 NBR O-rings inside and 2 outside a plastic bearing, EPDM rubber manchette
Wedge	Ductile iron, GGG-50, core fully vulcanised with EPDM rubber, with integral wedge nut of dezincification resistant brass, CZ 132 to BS 2874
Thrust collar	Dezincification resistant brass, CZ 132 to BS 2872
Bonnet bolts	Stainless steel A2, sealed with hot melt
Bonnet gasket	EPDM rubber




For further specification, see section "Technical information"  
The designs, materials and specifications shown are subject to change without notice due to our continuing programme of product development.

To DIN 3352 part 4  
With spigot ends for cast iron pipes to ISO 2531

**Component list**

- |                   |                          |
|-------------------|--------------------------|
| 1. Stem           | 7. EPDM rubber manchette |
| 2. NBR wiper ring | 8. Bonnet bolt           |
| 3. NBR O-ring     | 9. Bonnet gasket         |
| 4. Bearing        | 10. Wedge nut            |
| 5. Bonnet         | 11. Wedge                |
| 6. Thrust collar  | 12. Body                 |

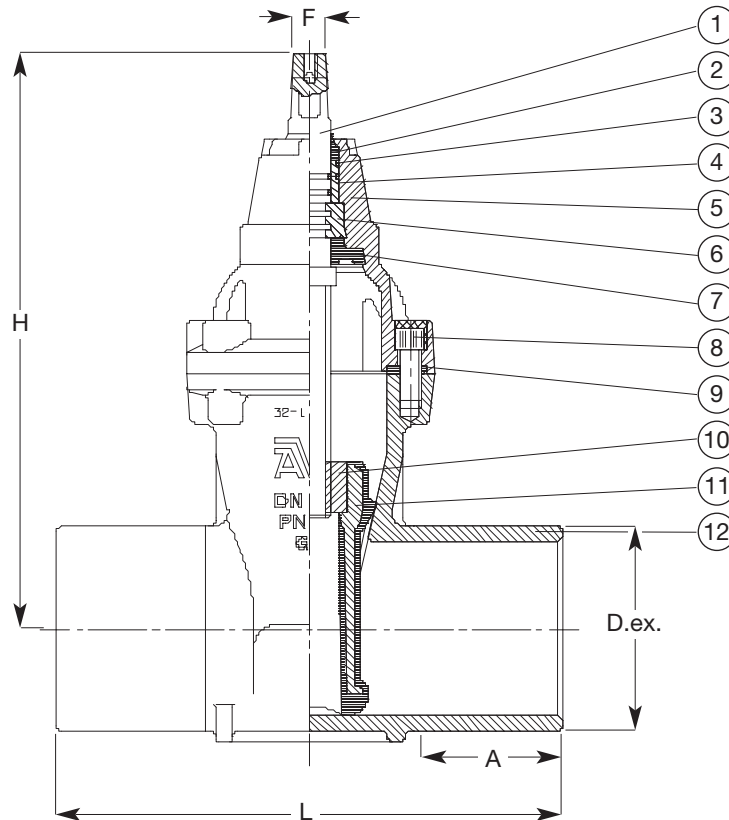

Ref. nos	DN	D.ex. mm	A mm	L mm	H mm	F mm	Weight kilos
32-050-70016	50	66	72	244	241	14	7.6
32-065-70016	65	82	81	264	271	17	11.0
32-080-70016	80	98	85	274	297	17	12.0
32-100-70016	100	118	86	294	334	19	17.0
32-125-70016	125	144	87	319	375	19	25.2
32-150-70016	150	170	96	344	448	19	34.7
32-200-70016	200	222	110	394	562	24	55.0
32-250-70016	250	274	131	444	664	27	79.0
32-300-70016	300	326	129	494	740	27	108.0